

SAI 管理運用マニュアル

■ SAIって何??

各住戸のインターホンをスマートフォンに置き換えたオートロックシステムです！



エントランス

呼出



映像通話・遠隔開錠



入居者スマホ

入居者は「ICカード」をリーダー部分にかざして、オートロックの開錠を行います！



カードリーダー



専用ICカード

■ 目次

① 退居時のスマホ端末情報の削除	…	1
② 入居時のスマホ端末情報の登録	…	2
③ 入居者が機種変更した時	…	3
④VIPマネージャーのDL方法	…	4
⑤ カードキーの登録	…	5
⑥ カードキーの削除	…	6
⑦ 暗証番号の登録	…	7
⑧ 暗証番号の削除		

① 入居者が退去するとき


■ 物件専用URLサイトへのログイン方法

当物件用URLサイト：

xxxxxxxx.comelitdns.com:8080



入力後、Enterキーを押します。操作が正常に完了すると、下記のようなページが表示されます。

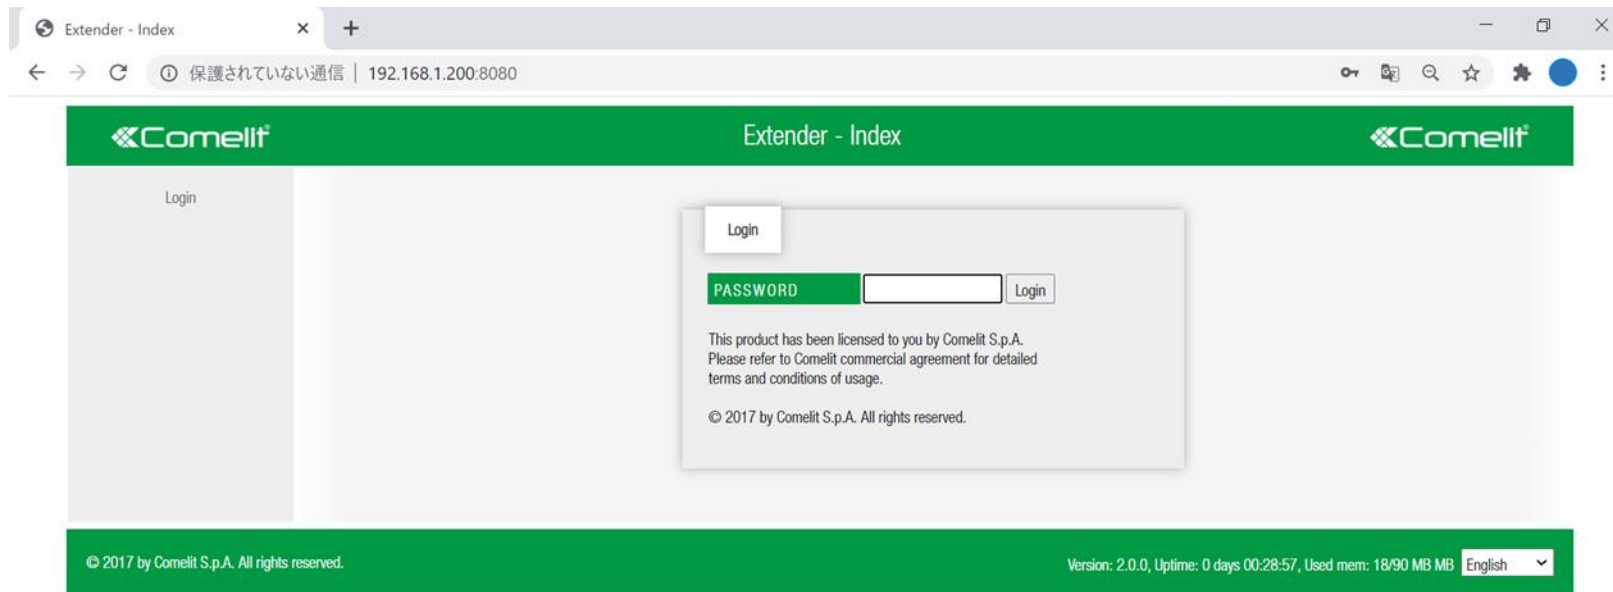

■ ログイン画面

パスワード入力して「Login」ボタンを押してください。

パスワード : comelit

Extender - Index

Comelit

Comelit

Login

Login

PASSWORD

Login

This product has been licensed to you by Comelit S.p.A.
Please refer to Comelit commercial agreement for detailed
terms and conditions of usage.

© 2017 by Comelit S.p.A. All rights reserved.

© 2017 by Comelit S.p.A. All rights reserved.

Version: 2.0.0, Uptime: 0 days 00:28:57, Used mem: 18/90 MB MB English

ログインが正常に完了すると、下記のページが表示されます

The screenshot shows a web browser window with the following details:

- Browser tab: Extender - Login
- Address bar: 保護されていない通信 | 192.168.1.200:8080/do-login.html
- Page Header: Comelit logo, Extender - Login, Comelit logo
- Left Navigation Menu:
 - Apartments
 - Backup/Restore
 - Configuration
 - Diagnostics
 - Licenses
 - SIP Phone activation
 - ViP Directories
 - Password Change
 - Device Info
 - Installer Logout
 - Reboot
- Main Content Area: A central message box with a green header "ACCESS GRANTED AS INSTALLER" and the text "Your session will expire after 10 minutes of inactivity."
- Page Footer:
 - © 2017 by Comelit S.p.A. All rights reserved.
 - Version: 2.0.0, Uptime: 0 days 00:36:38, Used mem: 19/90 MB MB
 - Language: English (dropdown menu)

「Apartments」をクリックし、部屋一覧を確認できます。
1棟8戸のマンションの場合、8列（8ライセンス）の項目があります。
退去する入居者の列の「Users」をクリックします。

Comelit Extender - Apartments Comelit

Apartments ①

Backup/Restore

Configuration

Diagnostics

Licenses

SIP Phone activation

VIP Directories

Password Change

Device Info

Installer Logout

Reboot

Periodic invitation email

BUILDING DESCRIPTION	CONTACT EMAIL	CONTACT PHONE
Brave Systems	Click to edit	Click to edit
MAXIMUM INVITE ATTEMPTS	INVITATION PERIOD	PERIODIC INVITATION
12 ▾	1 ▾	Disabled ▾
Maximum number of invitation mails to be sent for a single user	Frequency for sending invitatoin email, in weeks	Send periodic invitation email to users who did not activated the app yet

Apartments configuration

Available licenses: [Master: 0/3]

Export as CSV file: Apartments Users Act Codes

Invite All New Users: Invite

#	LICENSE	VIP ADDRESS	DESCRIPTION	DIRECTORY	CALL DIVERT WHEN BUSY	VIP ADDRESS FOR CALL DIVERT	RESET	USERS	EXTERNAL UNIT DIRECTORY
<input checked="" type="checkbox"/> 1	Master ▾	00000101	101	Default ▾	<input type="checkbox"/>	Click to edit	Full Reset	Users ②	<input type="checkbox"/>
<input checked="" type="checkbox"/> 2	Master ▾	00000201	201	Default ▾	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>
<input checked="" type="checkbox"/> 3	Master ▾	00000202	202	Default ▾	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>

部屋番号の列

「Reset activation」をクリックします。「OK」をクリックし、登録情報の削除の完了です。

Comelit Extender - Users

Apartment 00000101 (Master) - Users Configuration

Apartment Users

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EXTERNAL UNIT DIRECTORY	CLOUD SYNC STATUS
<input checked="" type="checkbox"/> 1	Apps	Activated	Reset activation	Master	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 2	Apps	Activated	Reset activation	Wife	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 4	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	

Comelit Extender - Users

Apartment 00000101 (Master) - Users Configuration

Apartment Users

bravecomelit2.comelitdns.com:8080 の内容

Caution!

This will permanently remove activation for this user.

Do you really want to proceed?

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EXTERNAL UNIT DIRECTORY	CLOUD SYNC STATUS
<input checked="" type="checkbox"/> 1	Apps	Activated	Reset activation	Master	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 2	Apps	Activated	Reset activation	Wife	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	
<input checked="" type="checkbox"/> 4	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	Click to edit	

Activated 利用中

Not Activated 利用不可

② 新しい入居者が入るとき


■ 物件専用URLサイトへのログイン方法

当物件用URLサイト：

xxxxxxxx.comelitdns.com:8080




入力後、Enterキーを押します。操作が正常に完了すると、下記のようなページが表示されます。

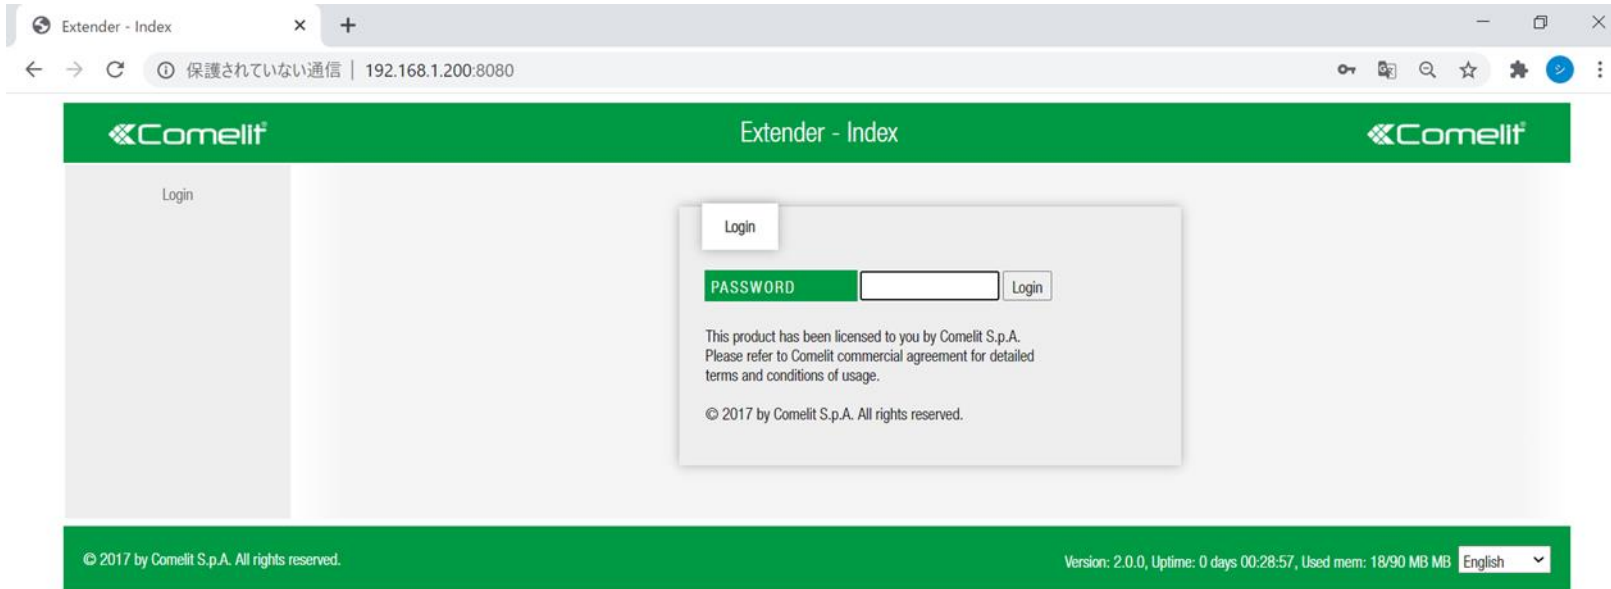

■ ログイン画面

パスワード入力して「Login」ボタンをくしてください。

パスワード : comelit

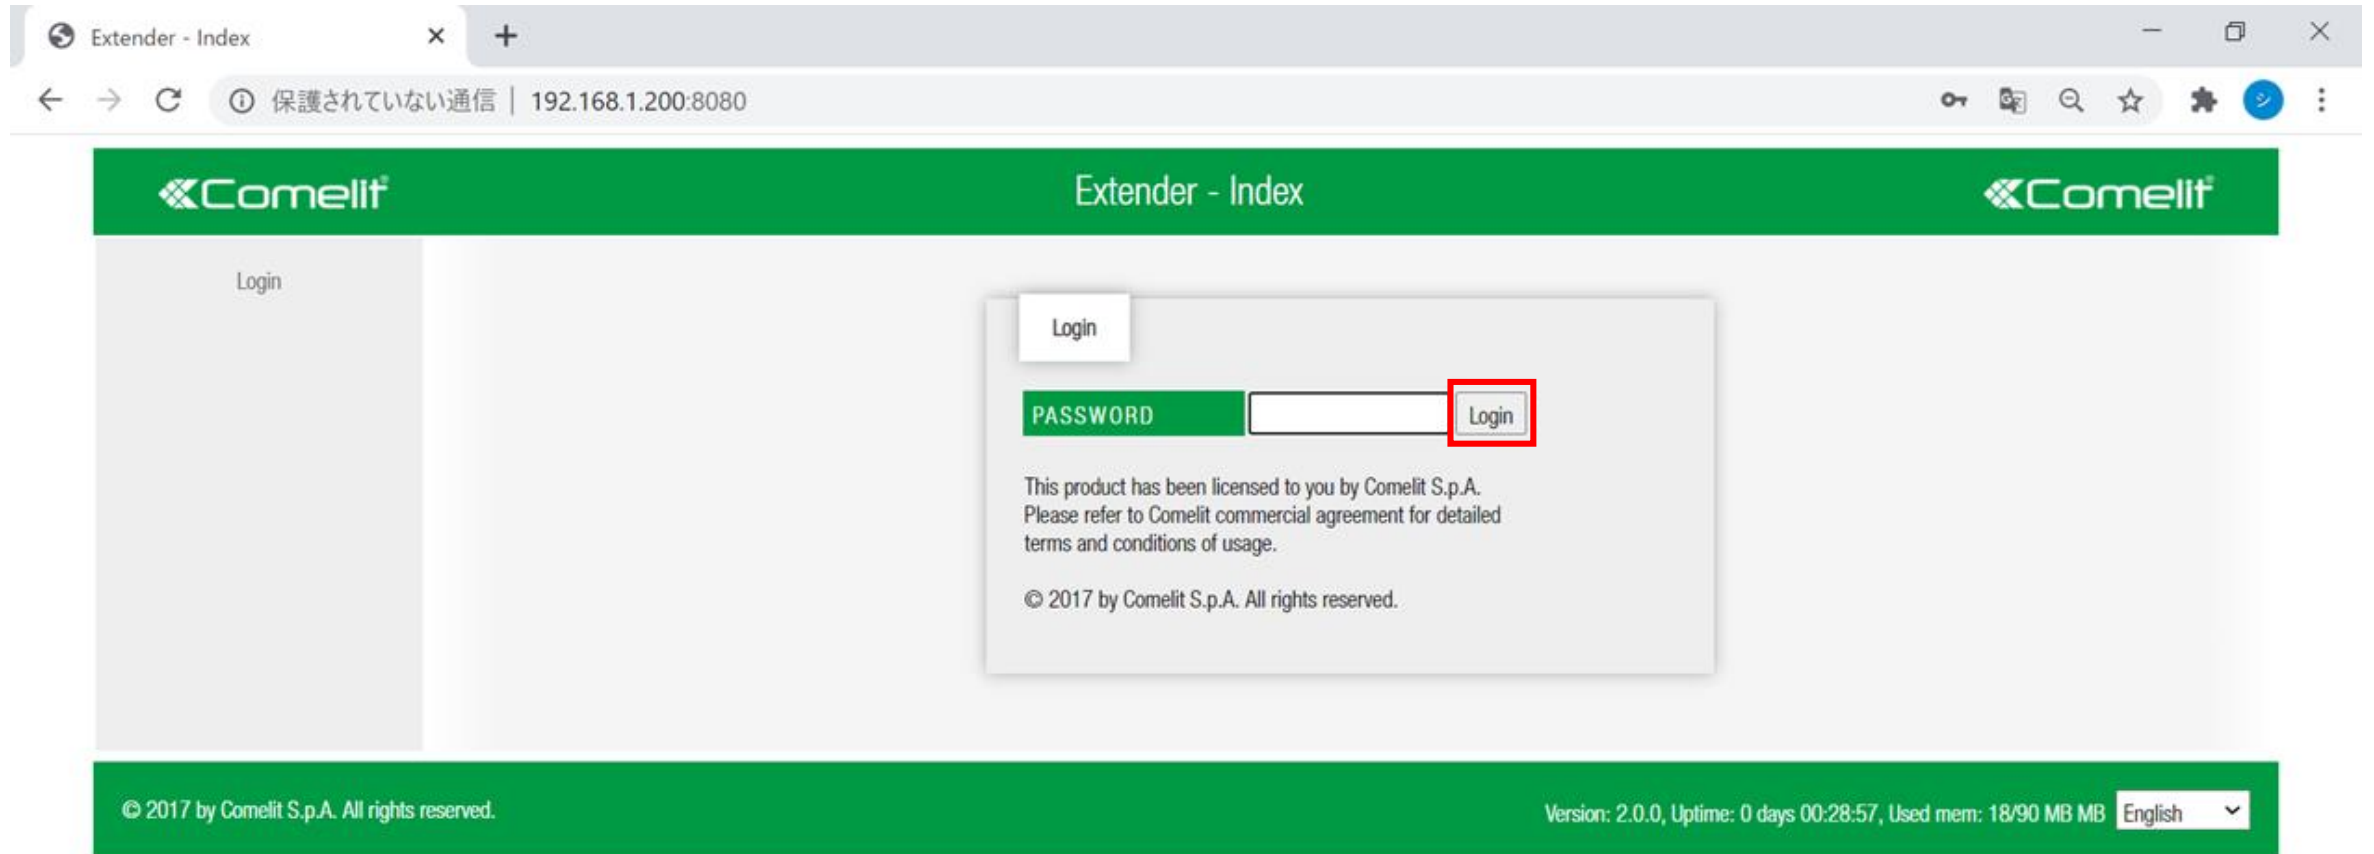

ログインが正常に完了すると、下記のページが表示されます

The screenshot shows a web browser window with the following details:

- Browser tab: Extender - Login
- Address bar: 保護されていない通信 | 192.168.1.200:8080/do-login.html
- Page Header: Comelit logo, Extender - Login, Comelit logo
- Left Navigation Menu:
 - Apartments
 - Backup/Restore
 - Configuration
 - Diagnostics
 - Licenses
 - SIP Phone activation
 - ViP Directories
 - Password Change
 - Device Info
 - Installer Logout
 - Reboot
- Main Content Area: A central message box with a green header "ACCESS GRANTED AS INSTALLER" and the text "Your session will expire after 10 minutes of inactivity."
- Page Footer:
 - © 2017 by Comelit S.p.A. All rights reserved.
 - Version: 2.0.0, Uptime: 0 days 00:36:38, Used mem: 19/90 MB MB
 - Language: English (dropdown menu)

「Apartments」をクリックし、部屋一覧を確認できます。1棟8戸のマンションの場合、8列（8ライセンス）の項目があります。新しい入居者の入る列の「Users」をクリックします。

Comelit Extender - Apartments Comelit

Apartments ①

Backup/Restore
Configuration
Diagnostics
Licenses
SIP Phone activation
VIP Directories
Password Change
Device Info
Installer Logout
Reboot

Periodic invitation email

BUILDING DESCRIPTION	CONTACT EMAIL	CONTACT PHONE
Brave Systems	Click to edit	Click to edit
MAXIMUM INVITE ATTEMPTS	INVITATION PERIOD	PERIODIC INVITATION
12	1	Disabled

Maximum number of invitation mails to be sent for a single user Frequency for sending invitatoin email, in weeks Send periodic invitation email to users who did not activated the app yet

Apartments configuration

Available licenses: [Master: 0/3] Invite All New Users:

Export as CSV file:

#	LICENSE	VIP ADDRESS	DESCRIPTION	DIRECTORY	CALL DIVERT WHEN BUSY	VIP ADDRESS FOR CALL DIVERT	RESET	USERS	EXTERNAL UNIT DIRECTORY
<input checked="" type="checkbox"/> 1	Master	00000101	101	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users ②	<input type="checkbox"/>
<input checked="" type="checkbox"/> 2	Master	00000201	201	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>
<input checked="" type="checkbox"/> 3	Master	00000202	202	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>

部屋番号の列

「」を入れ、「Generate activation code」をクリックすると認証コードが生成されます。

Browser: Extender - Users | 192.168.1.200:8080/users.html?id=0

Comelit Extender - Users Comelit

Apartment 00000101 (Master) - Users Configuration

← Apartments

Apartment Users

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EX UN DIF
<input checked="" type="checkbox"/> 1	Apps	Not Activated	Generate activation code	KANEKO	Click to edit	-	Click to edit	-	
<input type="checkbox"/> 2	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	-	
<input type="checkbox"/> 3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	-	
<input type="checkbox"/> 4	Phone	Phone to call	Click to edit	Click to edit	Click to edit	-	Click to edit	-	

※4台以上の利用はシステムが正常に作動しなくなります。
機器の登録台数は4台迄を遵守ください。

下記のように認証コードが表示されます。

The screenshot shows a web browser window with the URL `bravecomelit2.comelitdns.com:8080/users.html?id=0`. The page title is "Extender - Users" and the Comelit logo is visible in the top right. A sidebar on the left contains navigation options: Apartments, Backup/Restore, Configuration, Diagnostics, Licenses, SIP Phone activation, and VFD Directories. The main content area is titled "Apartment 00000101 (Master) - Users Configuration" and contains a table of "Apartment Users".

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EXTERNAL UNIT DIRECT
<input checked="" type="checkbox"/> 1	Apps	Not Activated	1gcb5a	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/> Click
<input checked="" type="checkbox"/> 2	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/> Click
<input checked="" type="checkbox"/> 3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/> Click
<input checked="" type="checkbox"/> 4	Phone	Phone to call	Click to edit	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/> Click

工事業者又は管理者から提供されたIPアドレス（URL）と生成した認証コードを、新しい入居者へお伝えください。以上で完了となります。

例：IPアドレス（URL）： x x x x x x x .comelitdns.com
認証コード： g227lr(例)

③ 機種変更のとき

入居者が機種変更された場合、一度、登録情報の削除と新しい認証コードが必要となります。

ステップ 1

機種変更された方の、登録情報を一度削除します。

ステップ 2

新しい認証コードを生成します。

ステップ 3

工事業者又は管理者から提供されたIPアドレス（URL）と生成した認証コードを、機種変更された入居者へお伝えください。以上で完了となります。

例：IPアドレス（URL）： x x x x x x x .comelitdns.com

認証コード： g227lr


■ 物件専用URLサイトへのログイン方法

当物件用URLサイト：

xxxxxxxx.comelitdns.com:8080




入力後、Enterキーを押します。操作が正常に完了すると、下記のようなページが表示されます。

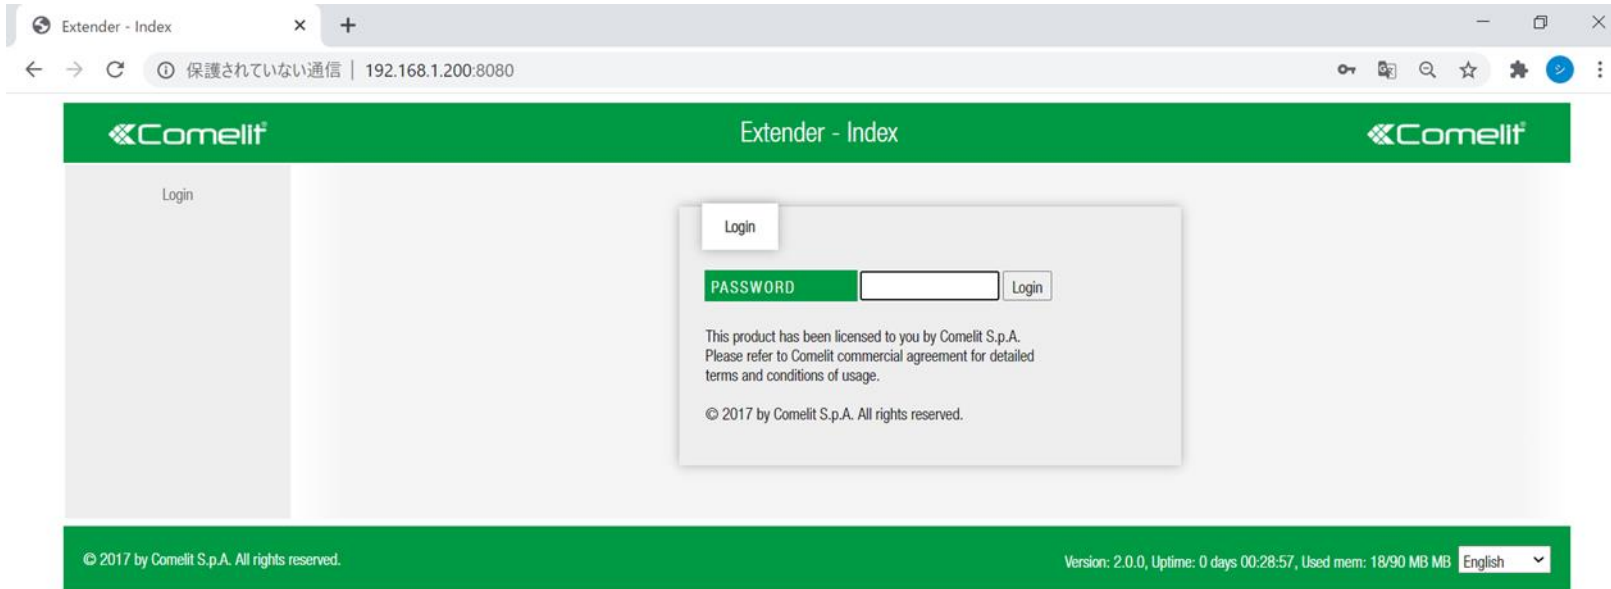

■ ログイン画面

パスワード入力して「Login」ボタンをくしてください。

パスワード : comelit

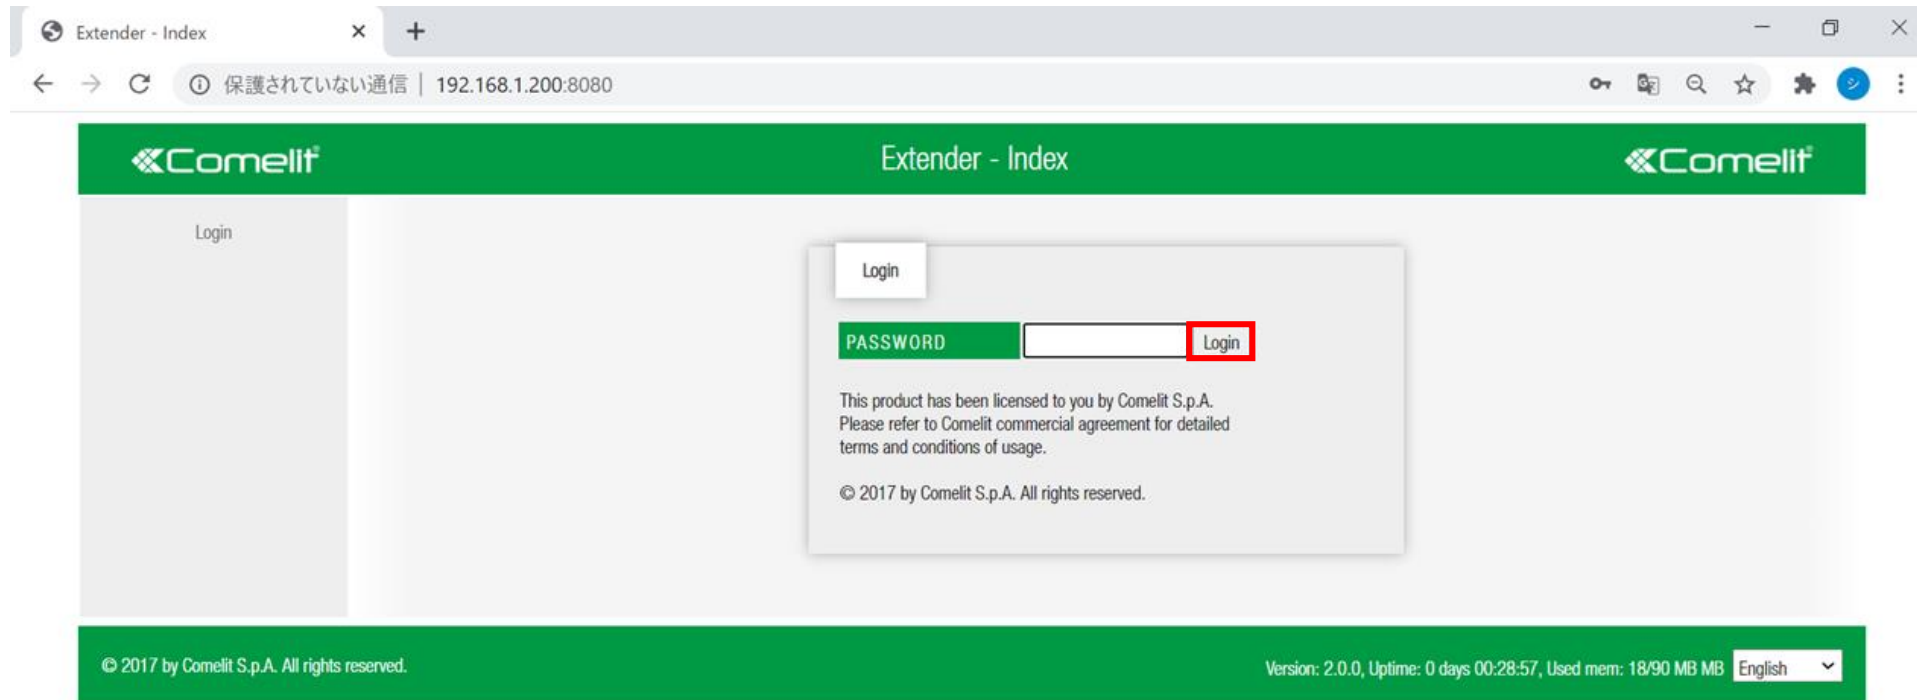

ログインが正常に完了すると、下記のようなページが表示されます

The screenshot shows a web browser window with the following details:

- Browser tab: Extender - Login
- Address bar: 保護されていない通信 | 192.168.1.200:8080/do-login.html
- Page Header: Comelit logo, Extender - Login, Comelit logo
- Left Navigation Menu:
 - Apartments
 - Backup/Restore
 - Configuration
 - Diagnostics
 - Licenses
 - SIP Phone activation
 - ViP Directories
 - Password Change
 - Device Info
 - Installer Logout
 - Reboot
- Central Content Area:
 - ACCESS GRANTED AS INSTALLER (highlighted in green)
 - Your session will expire after 10 minutes of inactivity.
- Page Footer:
 - © 2017 by Comelit S.p.A. All rights reserved.
 - Version: 2.0.0, Uptime: 0 days 00:36:38, Used mem: 19/90 MB MB
 - Language: English (dropdown menu)

「Apartments」をクリックし、部屋一覧を確認できます。1棟8戸のマンションの場合、8列（8ライセンス）の項目があります。機種変更した入居者の列の「Users」をクリックします。

Comelit Extender - Apartments Comelit

Apartments

Backup/Restore

Configuration

Diagnostics

Licenses

SIP Phone activation

VIP Directories

Password Change

Device Info

Installer Logout

Reboot

Periodic invitation email

BUILDING DESCRIPTION	CONTACT EMAIL	CONTACT PHONE
Brave Systems	Click to edit	Click to edit
MAXIMUM INVITE ATTEMPTS	INVITATION PERIOD	PERIODIC INVITATION
12	1	Disabled

Maximum number of invitation mails to be sent for a single user Frequency for sending invitation email, in weeks Send periodic invitation email to users who did not activated the app yet

Apartments configuration

Available licenses: [Master: 0/3]

Export as CSV file: [Apartments](#) [Users](#) [Act Codes](#)

Invite All New Users: [Invite](#)

#	LICENSE	VIP ADDRESS	DESCRIPTION	DIRECTORY	CALL DIVERT WHEN BUSY	VIP ADDRESS FOR CALL DIVERT	RESET	USERS	EXTERNAL UNIT DIRECTORY
<input checked="" type="checkbox"/> 1	Master	00000101	KANEKO	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>
<input checked="" type="checkbox"/> 2	Master	00000201	MACHIDA	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>
<input checked="" type="checkbox"/> 3	Master	00000202	Brave TEL	Default	<input type="checkbox"/>	Click to edit	Full Reset	Users	<input type="checkbox"/>

「Reset activation」をクリックします。「OK」をクリックし、登録情報の削除の完了です。

bravecomelit2.comelitdns.com:8080/users.html?id=0

Comelit Extender - Users Comelit

Apartment 00000101 (Master) - Users Configuration

Apartment Users

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EXTERNAL UNIT DIRECTORY	CLOUD SYNC STATUS
1	Apps	Activated	Reset activation	KANEKO	Click to edit	-	Click to edit	-	Click to edit	
2	Apps	Activated	Reset activation	Click to edit	Click to edit	-	Click to edit	-	Click to edit	
3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	-	Click to edit	
4	Phone	Phone to call	Click to edit	Click to edit	Click to edit	-	Click to edit	-	Click to edit	

【注意事項】
一世帯で複数人（台）をご利用頂いている場合、機種変更された方だけの登録情報を削除してください。

bravecomelit2.comelitdns.com:8080 の内容

Caution!

This will permanently remove activation for this user.

Do you really want to proceed?

OK キャンセル

 Activated 利用中


 Not Activated 利用不可

「」を入れ、「Generate activation code」をクリックすると認証コードが生成されます。

The screenshot shows a web browser window with the URL `192.168.1.200:8080/users.html?id=0`. The page title is "Extender - Users" and the Comelit logo is visible in the top right. A sidebar on the left contains navigation links: Apartments, Backup/Restore, Configuration, Diagnostics, Licenses, and SIP Phone activation. The main content area is titled "Apartment 00000101 (Master) - Users Configuration" and contains a table of "Apartment Users".

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EX UN DIF
<input checked="" type="checkbox"/> 1	Apps	Activated	Reset activation	KANEKO	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/>
<input type="checkbox"/> 2	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/>
<input checked="" type="checkbox"/> 3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/>
<input checked="" type="checkbox"/> 4	Phone	Phone to call	Click to edit	Click to edit	Click to edit	-	Click to edit	<input type="checkbox"/> -	<input type="checkbox"/>

下記のように認証コードが表示されます。

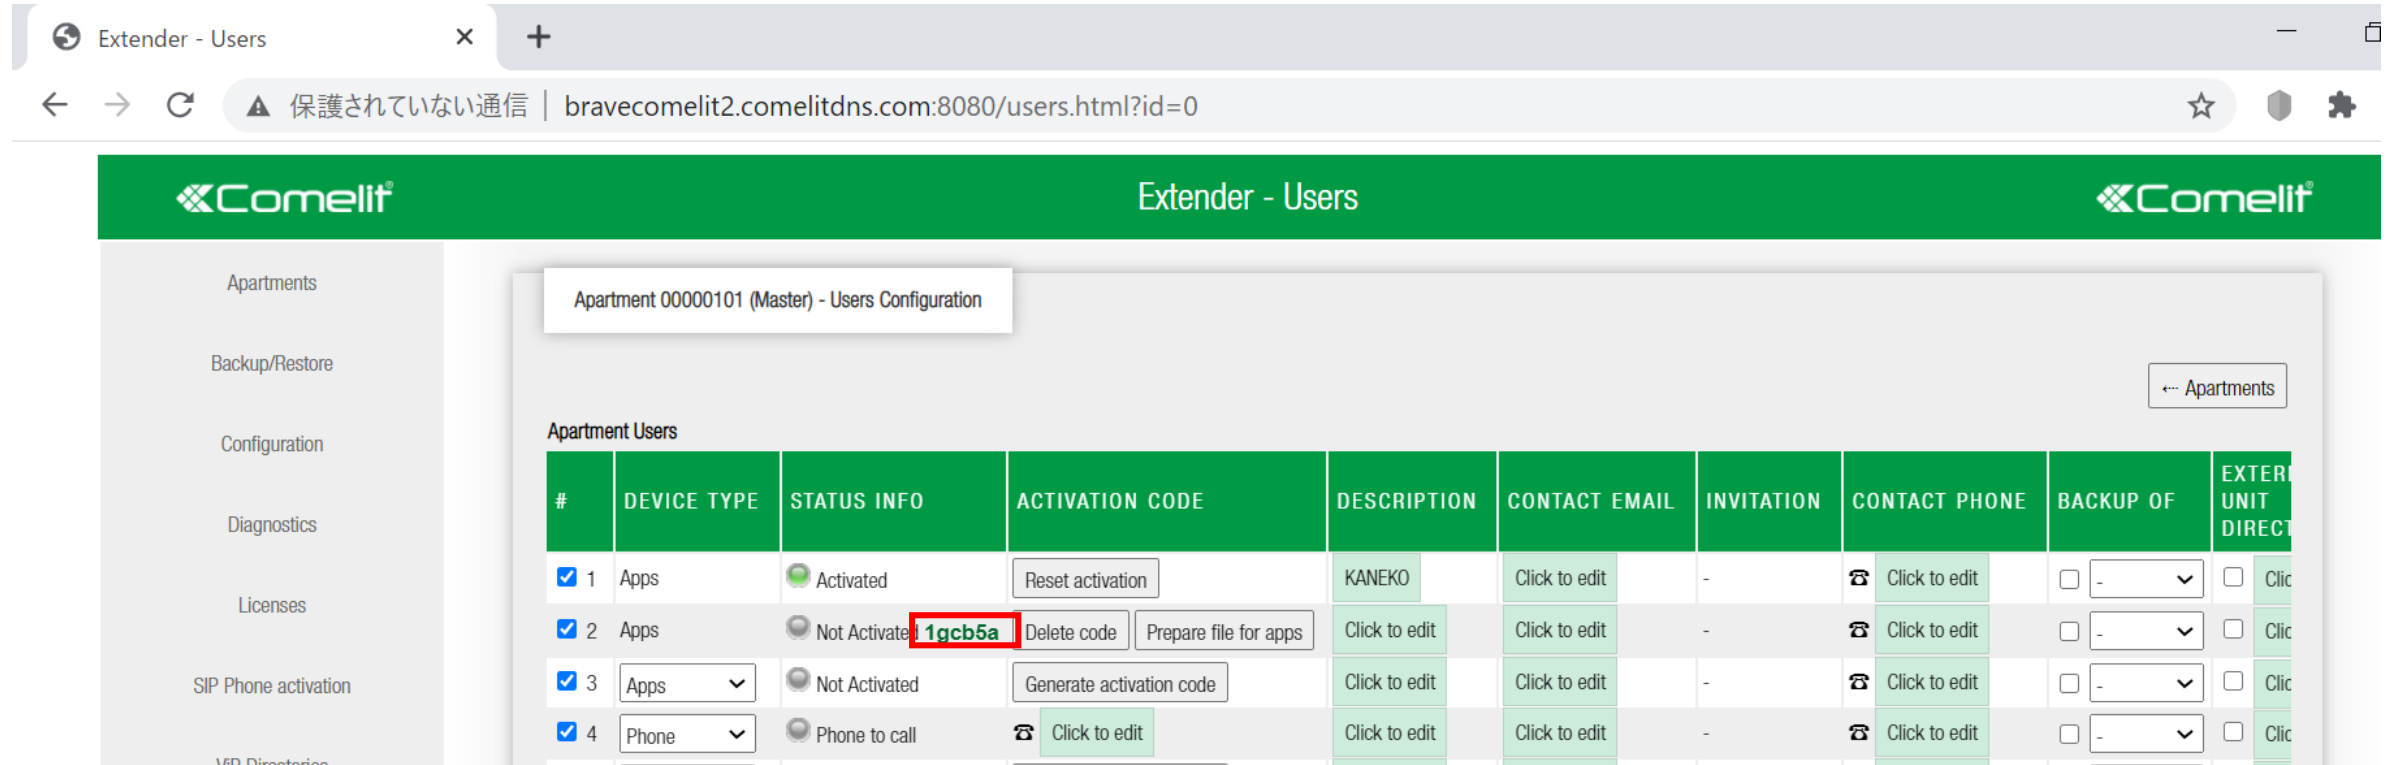

The screenshot shows a web browser window with the URL `bravecomelit2.comelitdns.com:8080/users.html?id=0`. The page title is "Extender - Users". The main content area is titled "Apartment 00000101 (Master) - Users Configuration". Below this, there is a table of "Apartment Users". The table has columns for #, DEVICE TYPE, STATUS INFO, ACTIVATION CODE, DESCRIPTION, CONTACT EMAIL, INVITATION, CONTACT PHONE, BACKUP OF, and EXTERNAL UNIT DIRECT. The second row shows a user with device type "Apps", status "Not Activated", and an activation code "1gcb5a" highlighted in a red box. The third row shows a user with device type "Apps" and status "Not Activated", with a "Generate activation code" button. The fourth row shows a user with device type "Phone" and status "Phone to call", with a "Click to edit" button.

#	DEVICE TYPE	STATUS INFO	ACTIVATION CODE	DESCRIPTION	CONTACT EMAIL	INVITATION	CONTACT PHONE	BACKUP OF	EXTERNAL UNIT DIRECT
1	Apps	Activated	Reset activation	KANEKO	Click to edit	-	Click to edit	-	Click to edit
2	Apps	Not Activated	1gcb5a Delete code Prepare file for apps	Click to edit	Click to edit	-	Click to edit	-	Click to edit
3	Apps	Not Activated	Generate activation code	Click to edit	Click to edit	-	Click to edit	-	Click to edit
4	Phone	Phone to call	Click to edit	Click to edit	Click to edit	-	Click to edit	-	Click to edit

工事業者又は管理者から提供されたIPアドレス（URL）と生成した認証コードを、機種変更した方へお伝えください。以上で完了となります。


例：IPアドレス（URL）： x x x x x x x .comelitdns.com
認証コード： g227lr

④ 設定・管理・運用ソフトウェア「VIP MANAGER」のインストール


- Windows PC用を無償でダウンロードできます。
- 条件：OS Windows®7（32bit、64bit）以降
- MACには対応していません。

ブラウザを開き、下記URLをアクセスします。

<https://pro.comelitgroup.com/>

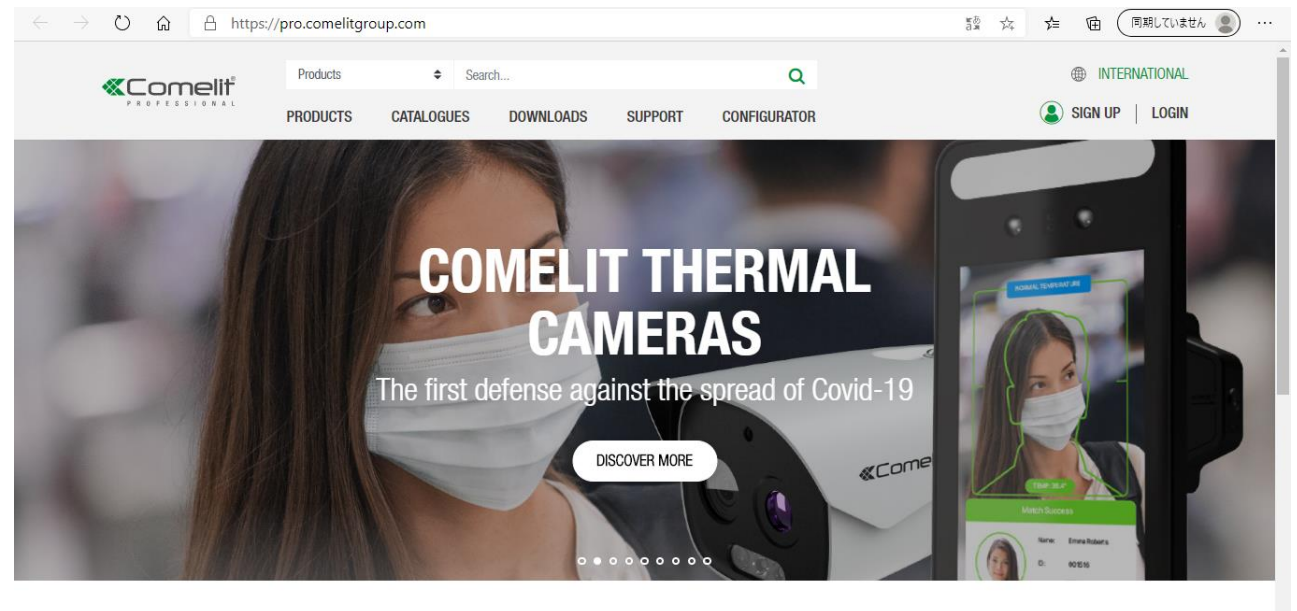


- ユーザーアカウント登録

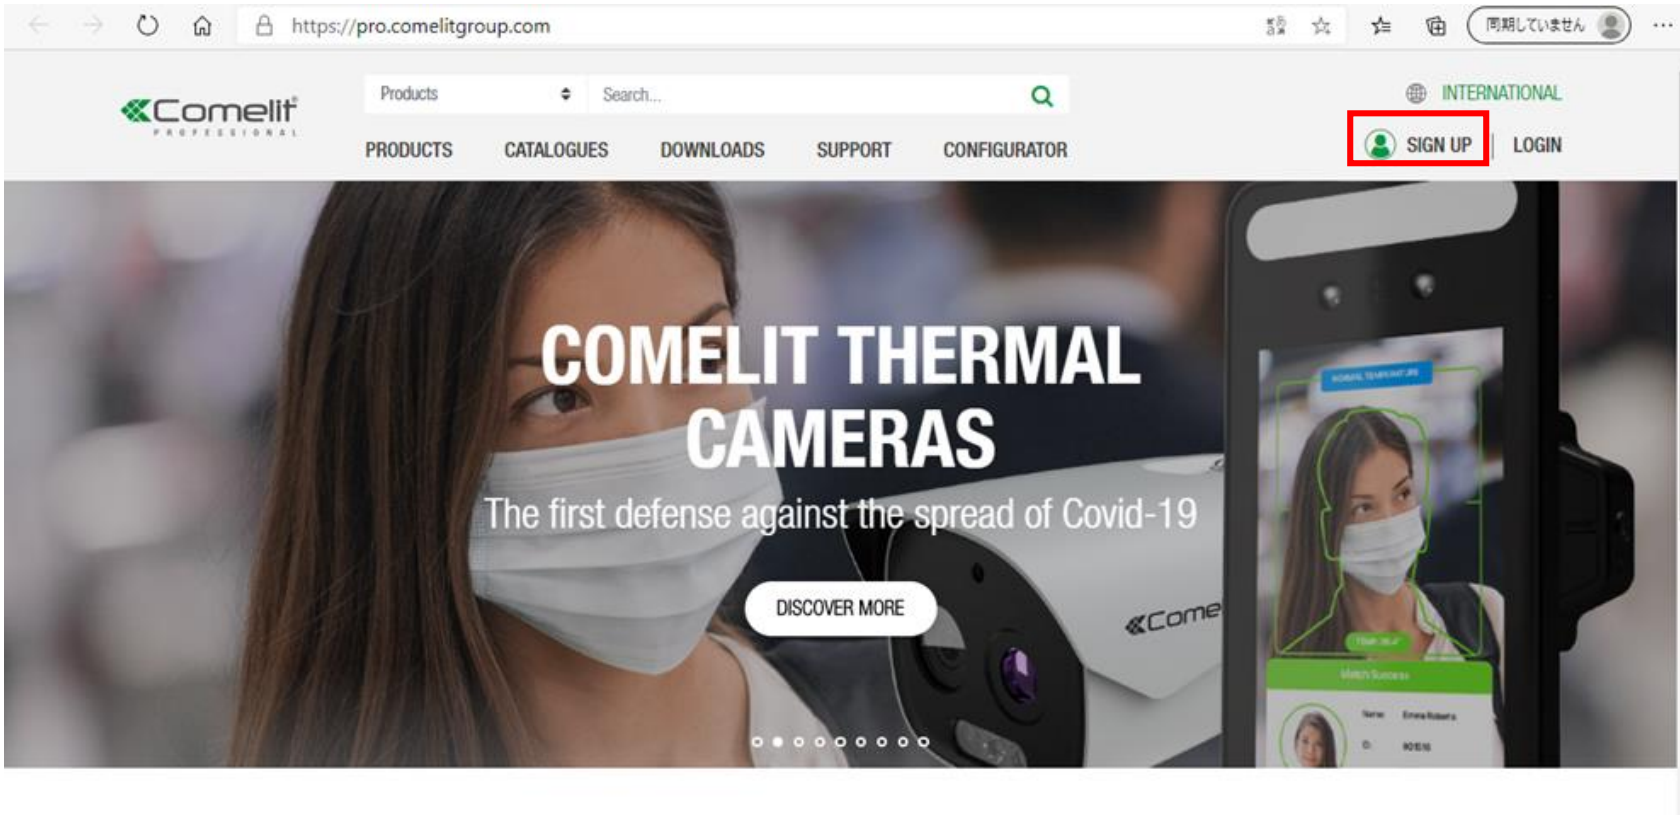

「SIGN UP」をクリックしてください。

・ ユーザーアカウント登録

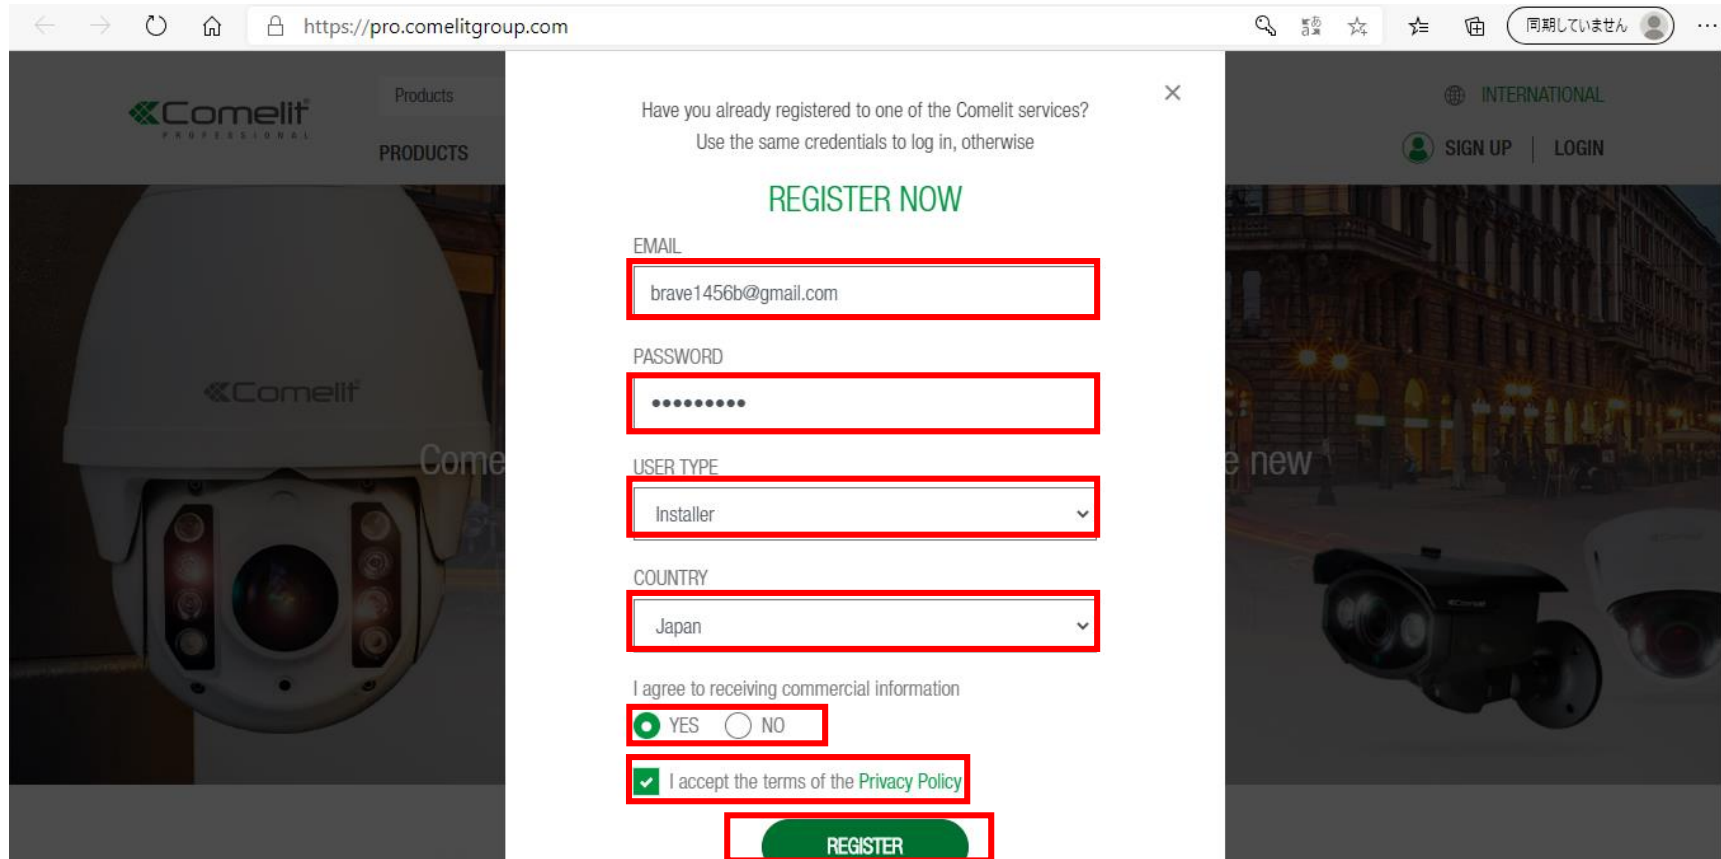

Have you already registered to one of the Comelit services?
Use the same credentials to log in, otherwise

REGISTER NOW

EMAIL
brave1456b@gmail.com

PASSWORD
.....

USER TYPE
Installer

COUNTRY
Japan


I agree to receiving commercial information
 YES NO

I accept the terms of the [Privacy Policy](#)

REGISTER



- ・ メールアドレスを入力します。
- ・ パスワードを入力します。
- ・ USER TYPE 「Installer」を選びます。
- ・ COUNTRY 「Japan」を選びます。
- ・ I agree to receiving・・・ : 「Yes/No」を選択します。
- ・ I accept the terms・・・ : とします。
- ・ 最後に「REGISTER」をクリックします。

ユーザーアカウント登録

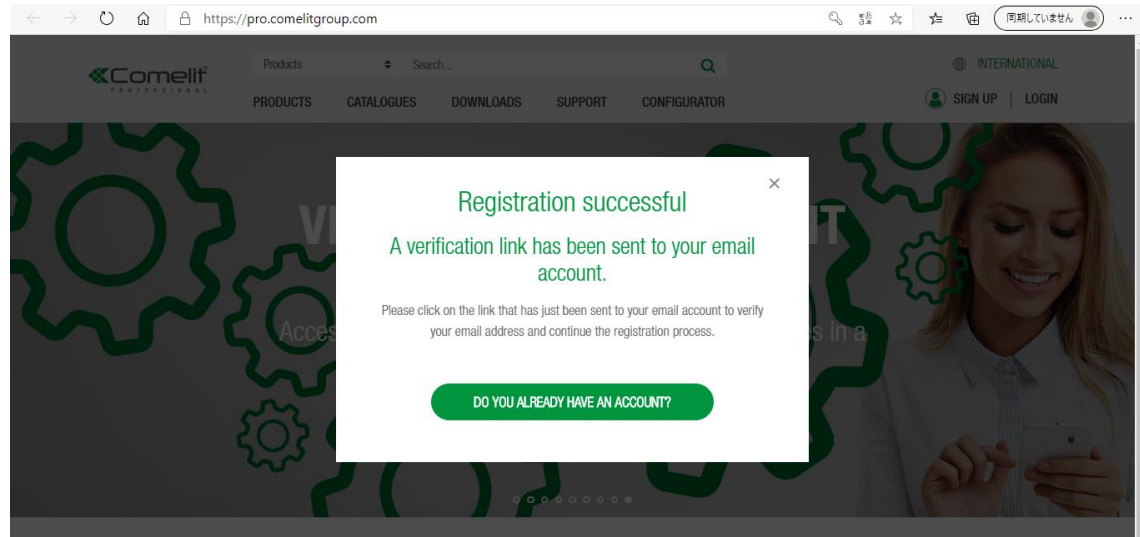


← ユーザーアカウント登録成功の画面


- 登録したメールアドレスに認証メールが送信されます。メール本文の認証URLをクリックして、登録を完了します。

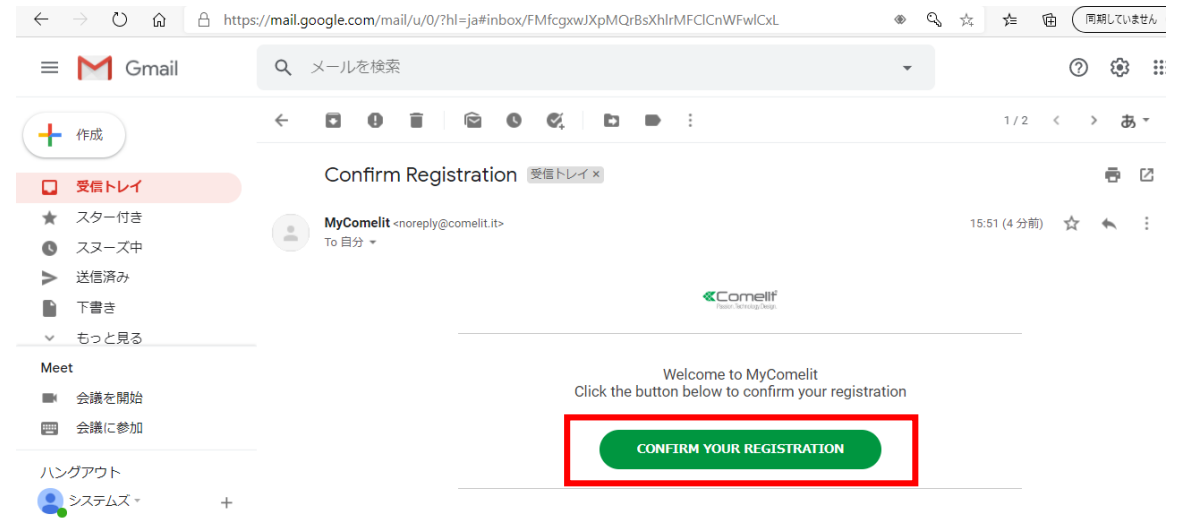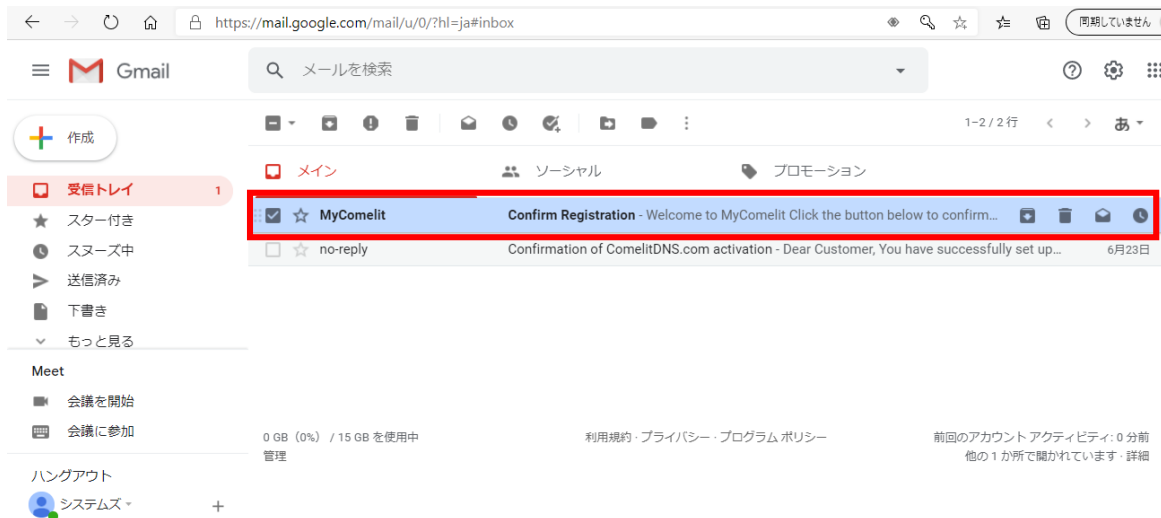

ログイン

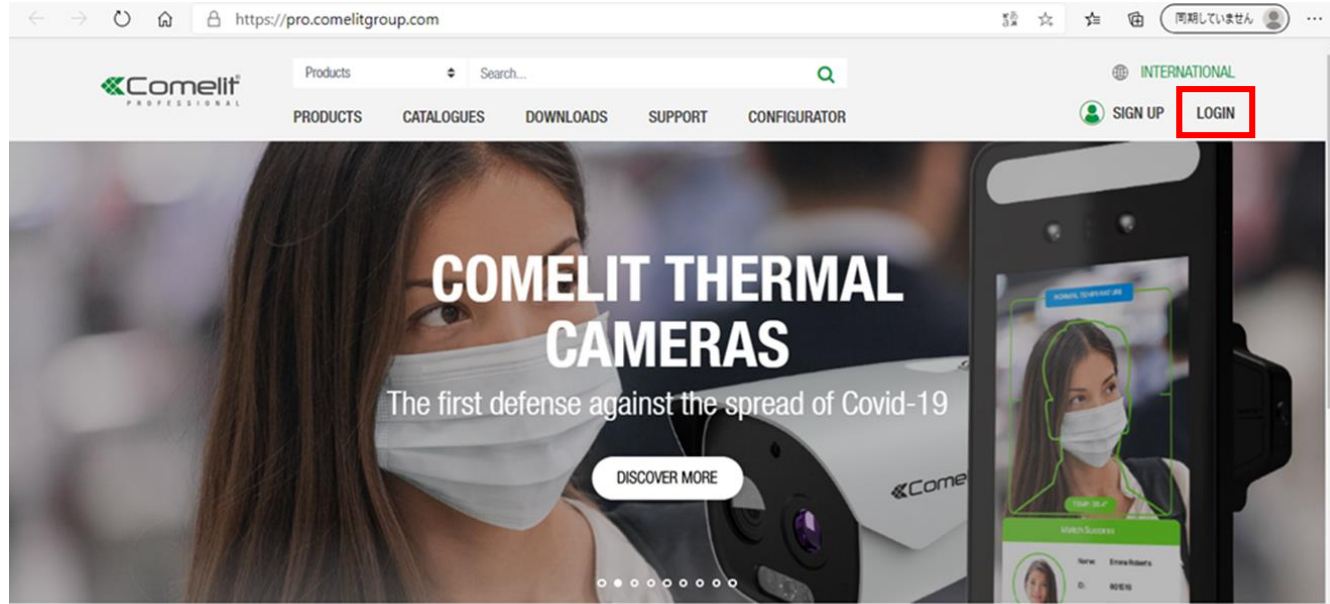

「LOGIN」をクリックしてください。

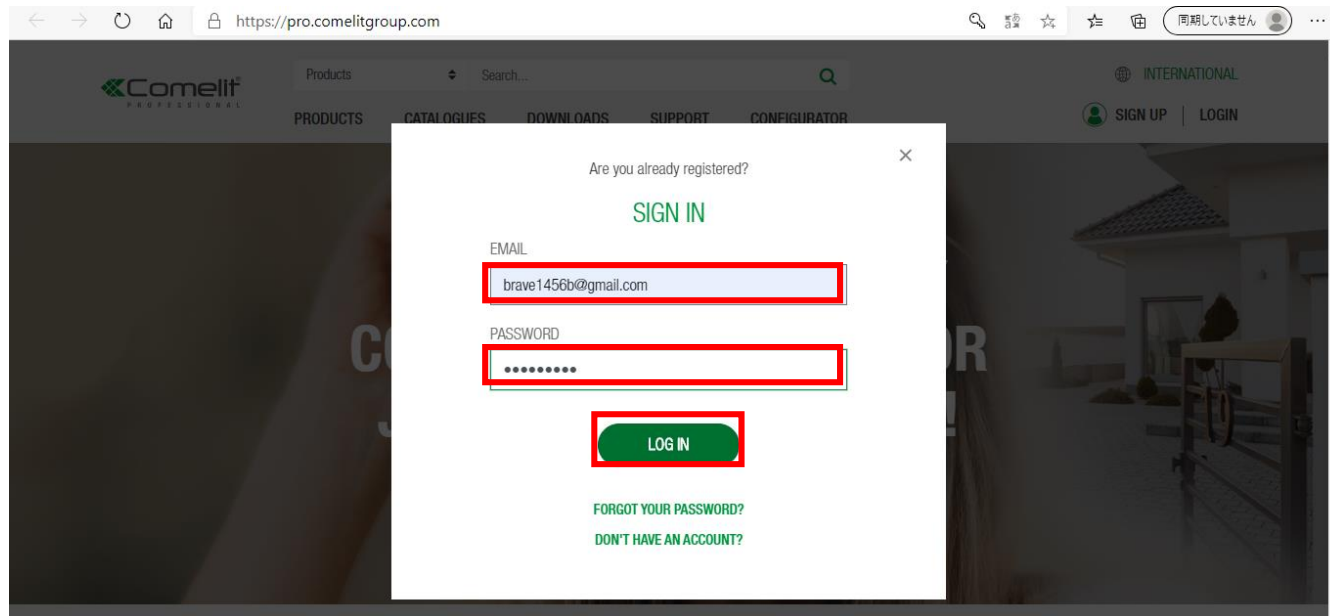

メールアドレス、パスワードを入力します。
最後に「LOGIN」をクリックします

・ダウンロード

The screenshot shows the Comelit Professional website interface. The browser address bar displays <https://pro.comelitgroup.com>. The navigation menu includes **PRODUCTS**, **CATALOGUES**, **DOWNLOADS** (highlighted with a red box), **SUPPORT**, and **CONFIGURATOR**. The user is logged in as **Hello Brave1456b**. The main content area is divided into seven product categories, each with a list of available documents:

Product Category	Available Documents
2-WIRE DOOR ENTRY SYSTEMS & KITS	Electric diagrams Synoptic diagrams Electric diagrams (dwg) Labels Technical sheets Firmware Software BIM
VIP SYSTEM	Technical sheets Firmware Software (highlighted with a red box) BIM
HOME AUTOMATION	Wiring diagrams (pdf, dwg) Technical sheets Firmware Software
ACCESS CONTROL	Technical sheets
CCTV	Technical sheets Firmware Software
INTRUDER ALARM	Electric diagrams Technical documents Firmware Software
FIRE DETECTION	Technical documents Firmware Software BIM

- ・「DOWNLOADS」をクリックします。
- ・一覧が表示されたら、「VIP SYSTEM」の「Software」をクリックします。

・ ダウンロード

← → ↻ 🏠 🔒 https://pro.comelitgroup.com/downloads/vip-system-3/software-6

Products Search... INTERNATIONAL

PRODUCTS CATALOGUES DOWNLOADS SUPPORT CONFIGURATOR Hello Brave1456b

HOME > DOWNLOADS > VIP.SYSTEM > SOFTWARE

10 results for: SOFTWARE in DOWNLOADS

FILTER RESULTS

- < VIP system
- Software
- Vip manager (1)**
- Communication Manager (1)
- Call log (1)
- Pc intercom (3)
- External unit (3)
- Compatibility (1)

VIP_COMPATIBILITY_INFORMATION - VIP COMPATIBILITY INFORMATION	! Warning	.pdf	62.8 KB	📄
Vip Manager - Software VipManager rel. 2.7.6 dat. 20200626 (OS min: Windows 7-64bit; NET min: 4.5.2 Framework; CPU min: 2GHz Dual Core; RAM min: 4GB; Free memory min: 200MB).	📁 Software	.zip	62.3 MB	📄
Communication manager - Software CommunicationManager rel. 2.7.6 dat. 20200626 (OS min: Windows 7-64bit; NET min:	📁 Software	.zip	62.0 MB	📄

画面左側の一覧の「ViP Manager」をクリックします。

← → ↻ 🔒 pro.comelitgroup.com/downloads/vip-system-3/software-6/vip-manager

Products Search... INTERNATIONAL

PRODUCTS CATALOGUES DOWNLOADS SUPPORT CONFIGURATOR SIGN UP | LOGIN

HOME > DOWNLOADS > VIP.SYSTEM > SOFTWARE > VIP.MANAGER

1 result for: VIP MANAGER in DOWNLOADS

FILTER RESULTS

- < VIP system
- < Software
- Vip manager

Vip Manager - Software VipManager rel. 2.7.6 dat. 20200626 (OS min: Windows 7-64bit; NET min: 4.5.2 Framework; CPU min: 2GHz Dual Core; RAM min: 4GB; Free memory min: 200MB).	📁 Software	.zip	62.3 MB	📄
--	------------	------	---------	---

OTHER DOWNLOADS

- Video door entry systems & Kits
- VIP system
- Home Automation
- Access Control

「ViP Manager」が表示されます。
右側のダウンロードマークをクリックしてダウンロードを開始します。

インストール

Comelit PROFESSIONAL

Products Search...

PRODUCTS CATALOGUES DOWNLOADS SUPPORT CONFIGURATOR

HOME > DOWNLOADS > VIP SYSTEM > SOFTWARE

10 results for: SOFTWARE in DOWNLOADS

FILTER RESULTS

< VIP system

Software

- Vip manager (1)
- Communication Manager (1)
- Call log (1)
- Pc intercom (3)
- External unit (3)
- Compatibility (1)

OTHER DOWNLOADS

Video door entry systems & Kits

sw-vip-manager.zip
ファイルを開く

ダウンロードファイルはzip形式で圧縮されています。
ダウンロードして解凍してください。

Comelit PROFESSIONAL

Products Search...

PRODUCTS CATALOGUES DOWNLOADS SUPPORT CONFIGURATOR

HOME > DOWNLOADS > VIP SYSTEM > SOFTWARE

10 results for: SOFTWARE in DOWNLOADS

FILTER RESULTS

< VIP system

Software

- Vip manager (1)
- Communication Manager (1)
- Call log (1)
- Pc intercom (3)
- External unit (3)
- Compatibility (1)

OTHER DOWNLOADS

Video door entry systems & Kits

1235A - Kit for printing nameplate labels - vanuacom, tkair, tkair metal and 316 Anale...

sw-vip-manager

ファイル ホーム 共有 表示

クイックアクセスにピン留めする コピー 貼り付け 移動先へ 削除 コピー先へ 名前の変更 新しいフォルダー プロパティ

クリップボード 整理 新規 開く 選択

名前 更新日時 種類 サイズ

Setup_VipManager_2.7.6

ファイルの説明: Vip Manager Installer
会社: Comelit Group S.p.A.
ファイルバージョン: 2.7.6.0
作成日時: 2020/06/30 17:35
サイズ: 63.9 MB

フォルダを解凍後、セットアッププログラムを実行します。


Setup_VipManager_2.7.6

Ver 2.7.6 の例


・ インストール



↑の画面が表示されたら、
「I agree to the License terms and conditions.」を☑として、「INSTALL」をクリックします。

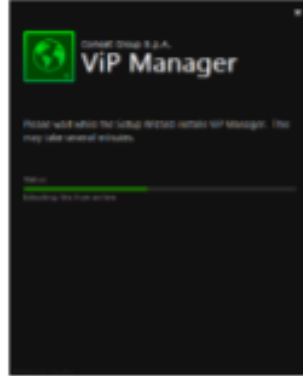

インストール中の画面

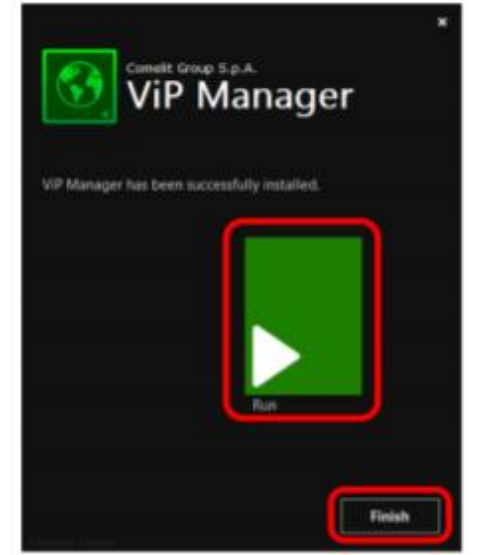


インストールが完了すると↑の画面が表示されます。
「Run（すぐに実行）」
または
「Finish（後で実行）」をクリックして
インストールを終了します。

- アイコン (VIP MANAGER)



- 起動時の初期画面

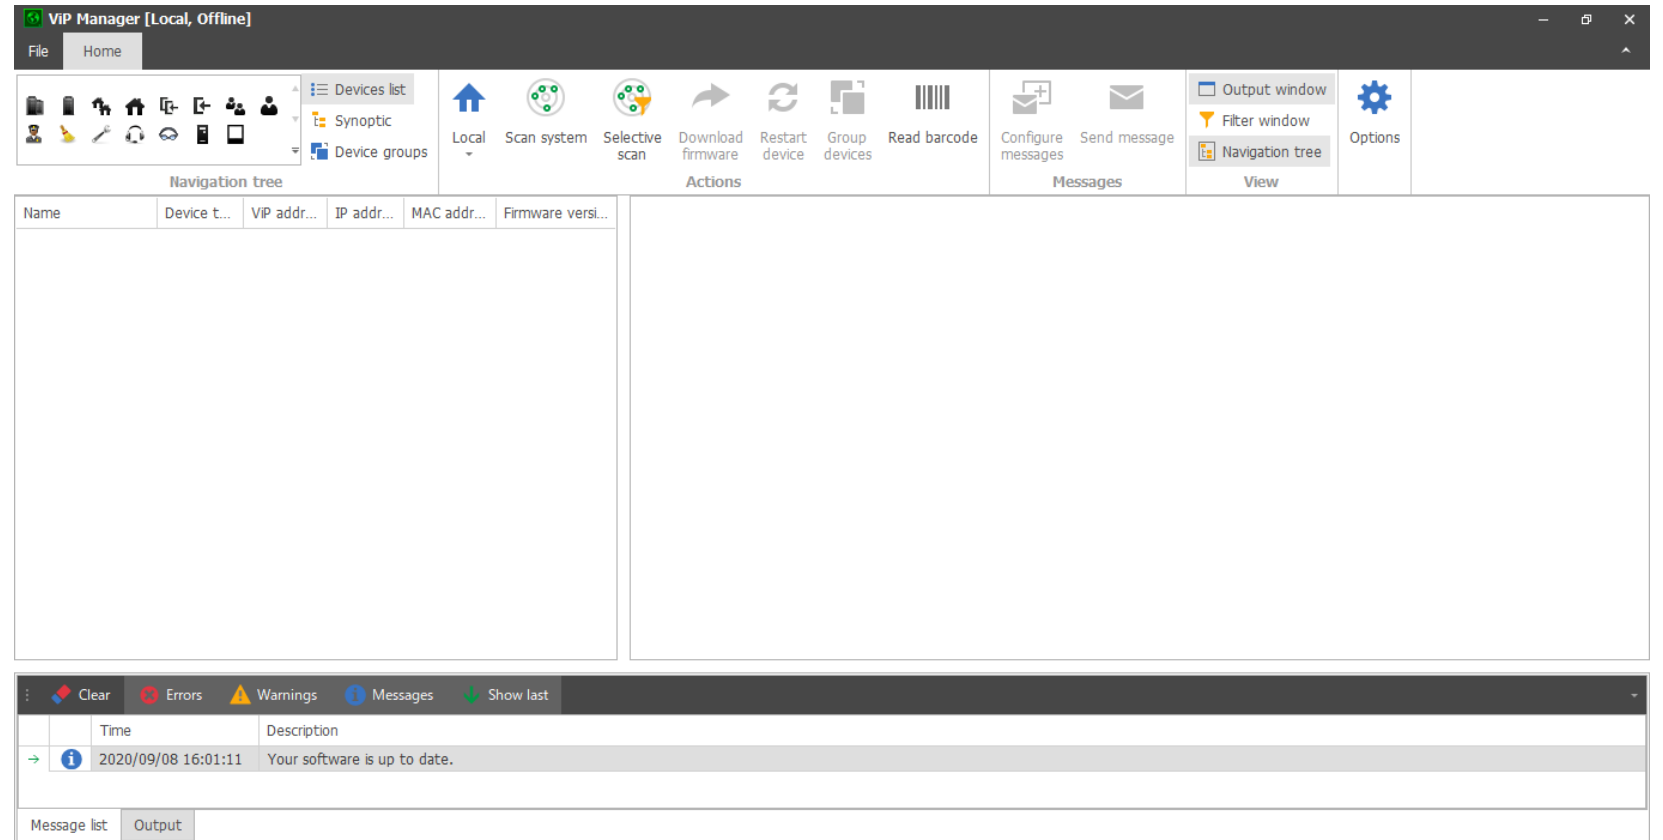


The screenshot displays the VIP Manager application window. The title bar reads "VIP Manager [Local, Offline]". The interface includes a menu bar with "File" and "Home", a toolbar with various icons, and a navigation tree on the left. The main area is divided into sections for "Actions" and "Messages". The "Messages" panel at the bottom shows a notification: "2020/09/08 16:01:11 Your software is up to date." with a "Show last" button.


Name	Device t...	VIP addr...	IP addr...	MAC addr...	Firmware versi...

Time	Description
2020/09/08 16:01:11	Your software is up to date.

⑤ ICカードの登録・削除/暗証番号の登録・削除

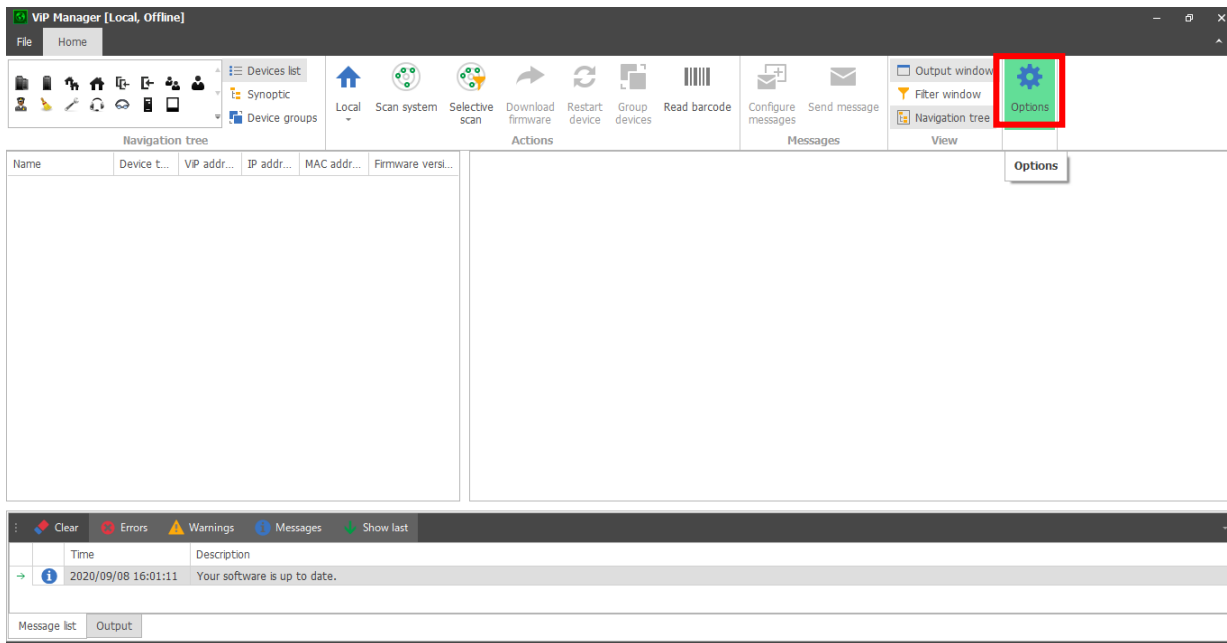


- VIP MANAGERを起動し、「Options」をクリックします

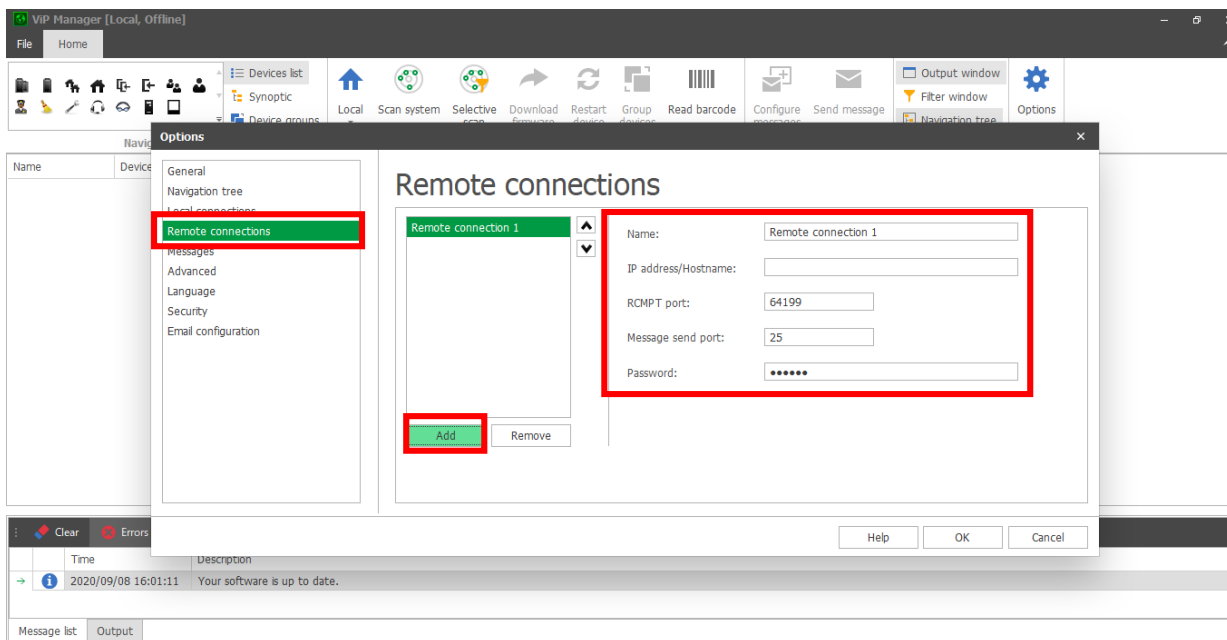


「Remote connections」を選択します。次に「Add」を選択します。
以下の項目を入力します。

- Name → 任意で入力してください。（例：パークハウス飯田橋）
- IP address/Hostname → 管理者にお問い合わせください。
- RCMP T port → 64199（初期値から変更しないでください）
- Message send port → 25（初期値から変更しないでください）
- Password → 管理者にお問い合わせください。

上記項目を入力後、「OK」を選択します。

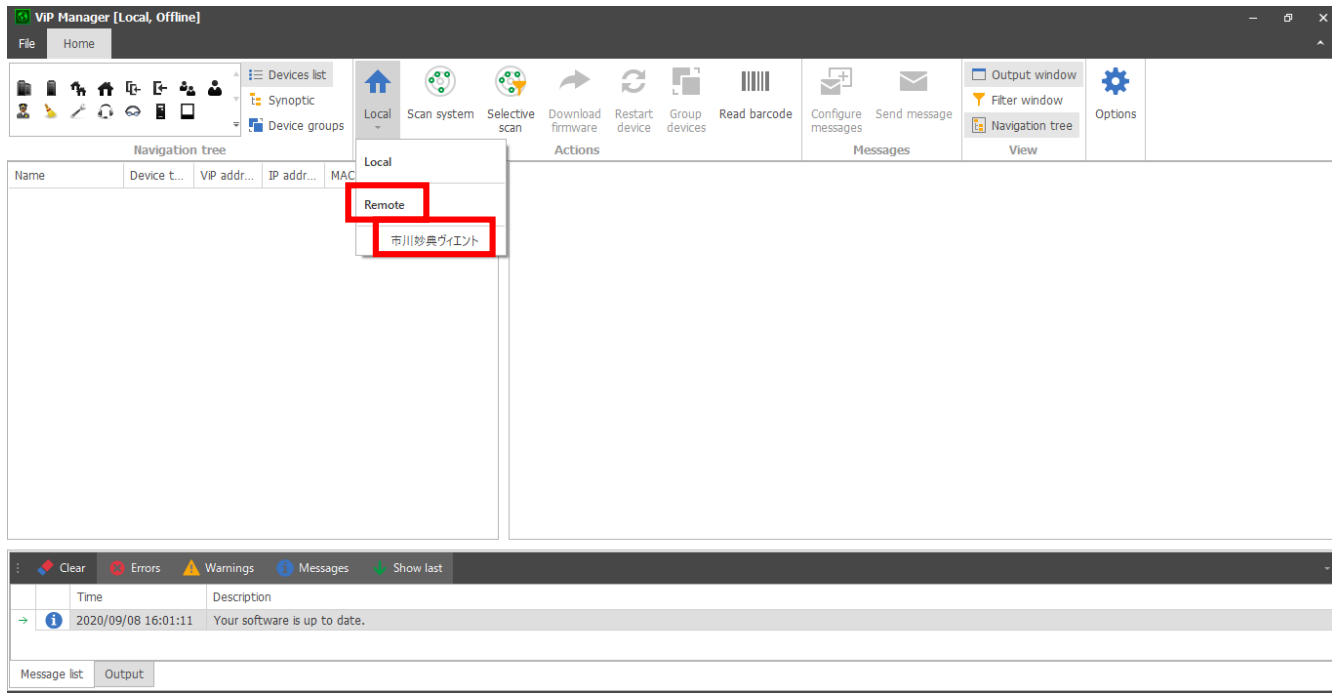

「Local」から「Remote」に変更し、運用する建物（システム）を選択します。

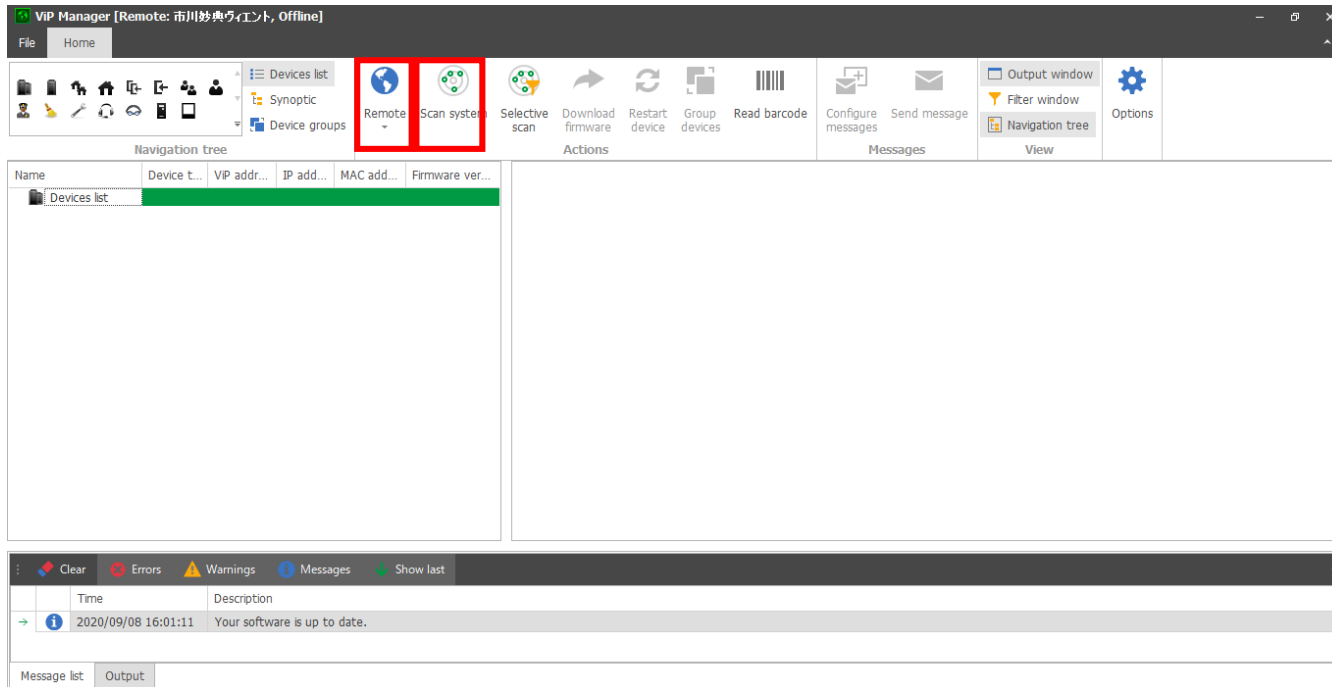

「Remote」に変更後、「Scan system」をクリックします。

